


VB CONNECTOR

Disconnectable Crimp style connectors



This large current carrying capacity connector for printed circuit boards can be used with primary power supply circuits of consumer electronic products and various other circuits requiring large currents.

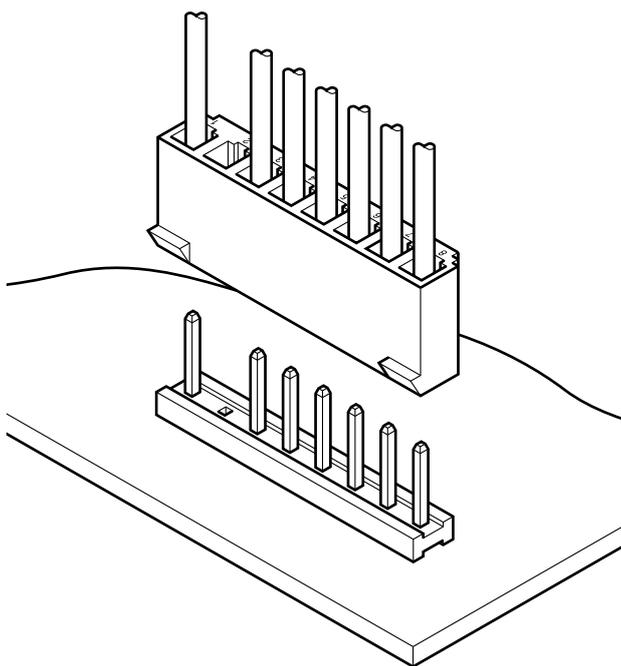

Features

● Proven box-shaped contact

This connector was designed and developed for use in the power supply circuits utilizing the contacts so successfully used in the VH connector.

Specifications

- Current rating: 7 A AC/DC (AWG #18)
- Voltage rating: 250 V AC/DC
- Temperature range: -25°C to +85°C
(including temperature rise in applying electrical current)
- Contact resistance: Initial value/ 10 mΩ max.
After environmental tests/ 20 mΩ max.
- Insulation resistance: 500 MΩ min.
- Withstanding voltage: 1,500 VAC/minute
- Applicable wire: AWG #22 to #18
- Applicable PC board thickness: 1.6 mm

Note:

Do not branch in parallel current which exceeds the rated current. If branched in parallel, current imbalance or other problems may develop. If it is absolutely necessary to branch such a large current in parallel, design the circuits without causing imbalance and provide an extra margin for each circuit.

* In using the products, refer to "Handling Precautions for Terminals and Connectors" described on our website (Technical documents of Product information page).

* RoHS2 compliance

* Dimensional unit: mm

* Contact JST for details.


Standards

Ⓜ Recognized E60389

Ⓢ Certified LR20812

VB CONNECTOR

Contact

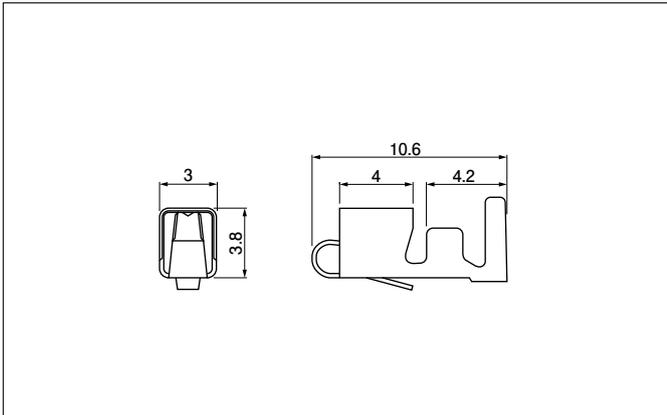

Model No.	Applicable wire		Insulation O.D. (mm)	Q'ty/reel
	mm ²	AWG #		
SVH-21T-P1.1	0.33 to 0.83	22 to 18	1.7 to 3.0	4,500

Material and Finish


Phosphor bronze, tin-plated (reflow treatment)

RoHS2 compliance

Contact	Crimping machine	Applicator		
		Crimp applicator	Dies	Crimp applicator with dies
SVH-21T-P1.1	AP-K2N	MKS-L	MK/SVH-21-11	APLMK SVH21-11

Note: Contact JST for fully automatic crimping applicator.

Housing

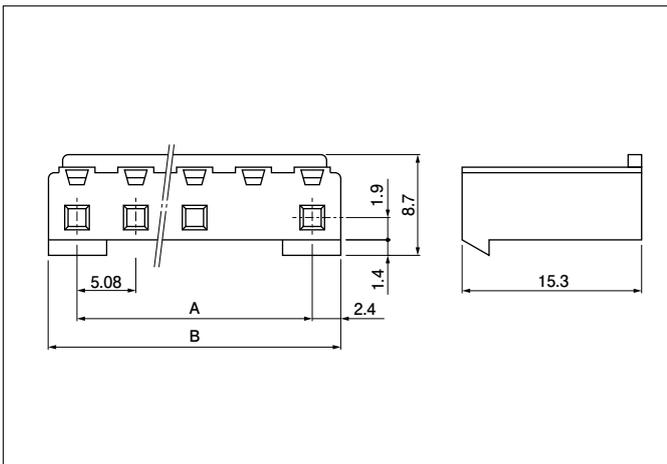


No. of circuits	Model No.	Dimensions (mm)		Q'ty/bag
		A	B	
2	VBR-2	5.08	9.88	1,000
2	VBR-2(3)	10.16	14.96	1,000
3	VBR-3	10.16	14.96	1,000
3	VBR-3(4)	15.24	20.04	1,000
4	VBR-4	15.24	20.04	1,000
4	VBR-4(5)	20.32	25.12	1,000
5	VBR-5(6)	25.40	30.20	500
6	VBR-6(7)	30.48	35.28	500
7	VBR-7(8)	35.56	40.36	500
8	VBR-8(9)	40.64	45.44	500
9	VBR-9(10)	45.72	50.52	500
12	VBR-12(13)	60.96	65.76	200

Material and Finish

PA 6, UL94V-0, natural (white)

RoHS2 compliance

Header

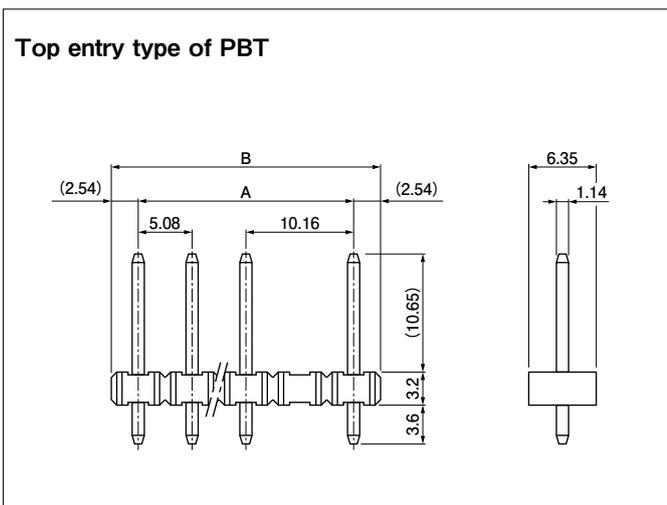

No. of circuits	Model No.	Dimensions (mm)		Q'ty/box
		A	B	
2	B2P-VB-2	5.08	10.16	1,000
2	B2P3-VB-2	10.16	15.24	500
3	B3P-VB-2	10.16	15.24	500
3	B3P4-VB-2	15.24	20.32	500
4	B4P-VB-2	15.24	20.32	500
4	B4P5-VB-2	20.32	25.40	250
5	B5P6-VB-2	25.40	30.48	250
6	B6P7-VB-2	30.48	35.56	200
7	B7P8-VB-2	35.56	40.64	200
8	B8P9-VB-2	40.64	45.72	200
9	B9P10-VB-2	45.72	50.80	100
12	B12P13-VB-2	60.96	66.04	100

Material and Finish


Post: Brass copper-undercoated, tin-plated (reflow treatment)
Wafer: PBT, UL94V-0, natural (white)

RoHS2 compliance This product displays (LF)(SN) on a label.


VB CONNECTOR

Header

Top entry type of PA

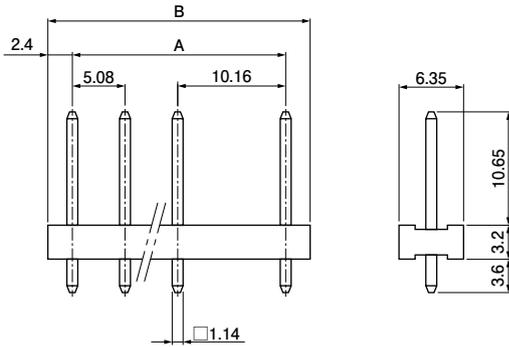

Side entry type of PA

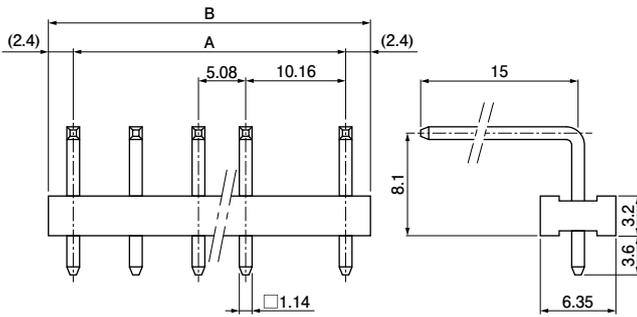

No. of circuits	Model No.		Dimensions (mm)		Q'ty/box	
	Top entry type	Side entry type	A	B	Top entry type	Side entry type
2	B2P-VB	B2PS-VB	5.08	9.88	1,000	1,000
2	B2P3-VB	—	10.16	14.96	500	—
3	B3P4-VB	B3P4S-VB	15.24	20.04	500	250
4	B4P5-VB	B4P5S-VB	20.32	25.12	250	200
5	B5P6-VB	B5P6S-VB	25.40	30.20	250	200
6	B6P7-VB	B6P7S-VB	30.48	35.28	200	100
7	B7P8-VB	B7P8S-VB	35.56	40.36	200	100
8	B8P9-VB	B8P9S-VB	40.64	45.44	200	100
9	B9P10-VB	B9P10S-VB	45.72	50.52	100	100
12	B12P13-VB	B12P13S-VB	60.96	65.76	100	100


Material and Finish

Post: Brass, copper-undercoated, tin-plated (reflow treatment)
Wafer: PA 66, UL94V-0, natural (white)


RoHS2 compliance This product displays (LF) (SN) on a label.

PC board layout and Assembly layout

Top entry type

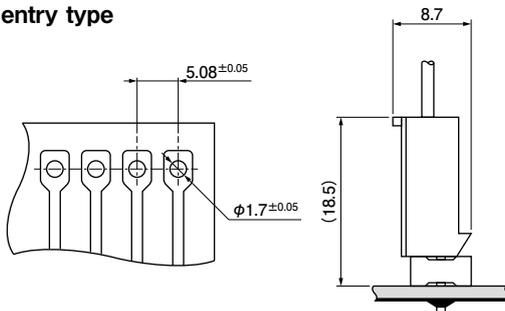


Side entry type

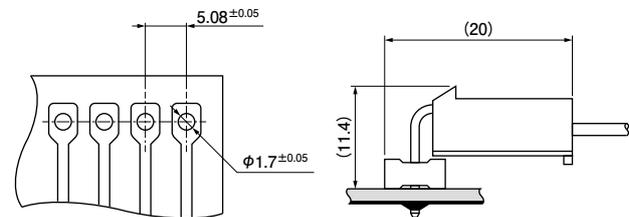


- Note: 1. The above figure is the figure viewed from soldering side.
2. Tolerances are non-cumulative: ± 0.05 mm for all centers.
3. Hole dimensions differ according to the type of PC board and piercing method. The dimensions above should serve as a guideline. Contact JST for details.

Model number allocation

Contact

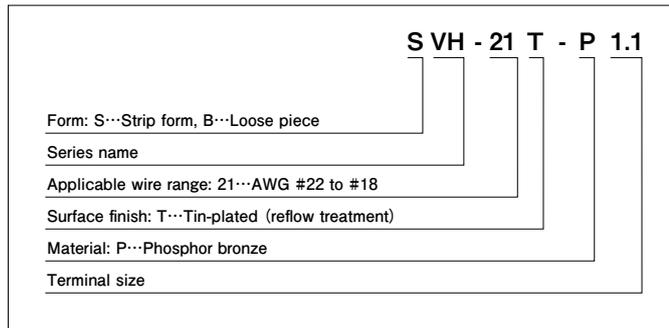

Housing

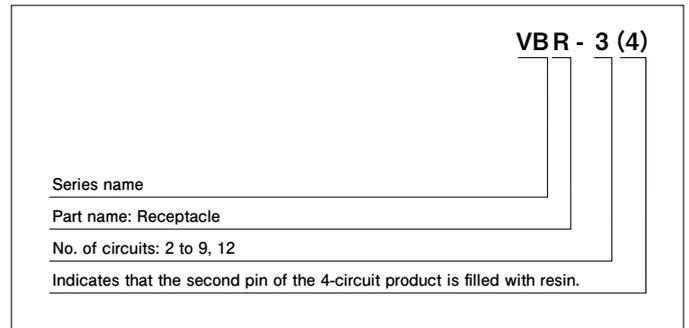

Header

