

PRODUCT GUIDE

VOL. 1

JST

The Quality Connection



WHO WE ARE

JST Deutschland GmbH was founded in August 1984 as a wholly owned subsidiary of J.S.T.-Mfg. Co. Ltd., Osaka, Japan, founded in 1957. Initially, the company exclusively manufactured and distributed loose piece terminals. Today, JST produces and distributes connectors worldwide for the consumer electronics, telecommunications, medical technology, camera, computer and automotive industries. In addition to our standard products, which are used worldwide in all industrial sectors, JST also offers customized solutions.

Following you will find an overview of our portfolio. Please understand that we cannot display all connectors from our large range here.

Contact us; we would be happy to support you with your project and convince you of our service and quality.

We look forward to your inquiry.

JST Deutschland GmbH
Küferstraße 15
D-73650 Winterbach
Switchboard: +49 / 71 81 / 40 07 – 0
Fax: +49 / 71 81 / 40 07 – 21
E-Mail: customer.service@jst.de
www.JST.de



Your JST Germany team

Your benefits:

- more than 50 years' experience
- local warehousing
- distribution sales network
- WebEDI and consignment stock
- separate samples logistic – samples within 1 working day
- German Project- / Product-Management
- dedicated inside and outside sales team
- highly skilled personnel in harness assembly
- tooling service
- technical support

Wire-to-Board connectors

Pitch	0.6 mm	0.8 mm		1.0 mm							1.2 mm
Product Series	XSR	SUH	SUR	NSH	NSHD	SH	SHD	SR/SZ	SHLD	SHLV	ACH
Current Rating	0.2A	1.0A (AWG #28)	* 0.5A (AWG #32)	1.0A (AWG #28)	1.0A (AWG #28)	1.0A (AWG #28)	1.0A (AWG #28)	0.7A	1.0A (AWG #28)	1.0A (AWG #28)	2.0A-1.5A (AWG #28)
Voltage Rating	30V	30V	30V	50V	50V	50V	50V	50V	50V	30V	50V
Temp. Range (°C) extension may be possible, pls. clarify	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85
Orientation	Side entry	Top/Side	Top/Side	Top/Side	Top/Side	Top/Side	Top/Side	Top/Side	Top/Side	Top/Side	Top entry side feed
Crimp		✓		✓	✓	✓	✓		✓	✓	✓
IDC	✓		✓					✓			
Through Hole								✓			
SMT	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Dual-Row					✓		✓		✓	✓	
Wire-to-Wire Available				✓							✓
Active Locking				✓	✓				✓	✓	
No. of positions	2, 4, 6, 10, 16, 20, 22	2, 3, 4, 5, 6, 8, 10, 12, 14, 16, 17, 20	2, 3, 4, 5, 6, 8, 10, 12, 14, 15, 16, 17, 20, 22	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15	16, 20, 24, 28, 32, 40	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 20	20, 30, 40, 50	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14	20, 30, 40, 50	21, 31	1, 2, 3, 4, 5
AWG range	36	32-28	36, 32	32-28	32-28	32-28	32-28	30	32-28	32-28	32-28
Remarks	mounting height only 1.45 mm	Compatible with SUR header	*0.2A for AWG #36	potting type header available		SR header is compatible with SH crimp style connector	gold plated		layout compatible with SHD header, gold plated	For LVDS applications	gold plated

Wire-to-Board connectors

Pitch	1.2 mm		1.25 mm						1.3 mm	1.5 mm	
Product Series	ACHF	ACHL	AGH	GERD	GEZ	GH	GHD	GX/GXW	ADH	SZN	ZA
Current Rating	2.5A (AWG #28)	2.0A (AWG #28)	1.0A (AWG #26)	1.5A (AWG #26)	1.5A (AWG #26)	1.0A (AWG #26)	*1.25A (AWG #26)	*2.0A (AWG #26)	3.0A (AWG #26)	0.7A (AWG #26)	0.7A (AWG #28)
Voltage Rating	50V	50V	50V	50V	50V	50V	50V	50V	30V	50V	50V
Temp. Range (°C) extension may be possible, pls. clarify	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85
Orientation	Top entry side feed	Top entry side feed	Top entry side feed	Top/Side	Top/Side	Top/Side	Top/Side	**Top/Side	Top entry side feed	Top entry board-in	Top entry board-in
Crimp	✓	✓	✓	✓	✓	✓	✓		✓	✓	
IDC								✓			✓
Through Hole										✓	✓
SMT	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Dual-Row				✓			✓	✓			
Wire-to-Wire Available											
Active Locking				✓	✓	✓	✓				
No. of positions	3, 4, 6	2	3	10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15	10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34**, 36, 38, 40	2, 3, 4, 5, 6, 7, 8, 9, 11, 13, 15, 17, 19, 21, 23, 25 GXW: 32, 36, 40	2, 3, 5	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13
AWG range	30-28	30-28	30-26	30-26	30-26	30-26	32-26	26, 28	26, 28	30-26	30, 28
Remarks	gold plated	gold plated	gold plated mounting height 4.4 / 6.1 mm			different keying available	*Gold-plated 1.0A (AWG 26) **Only for Tin- plated	*GXW (2-row): 1.5A (AWG#26) ** GXW: only top entry GXW: keying available	gold plated mounting height 1.9 mm	PCB thickness 0.6 to 1.2 mm	PCB thickness 0.6 to 1.2 mm

Wire-to-Board connectors

Pitch	1.5 mm					1.8 mm		2.0 mm			
Product Series	ZE	ZH	ZND	ZPD	ZR	LEA	SFH	CPM	CPT	DA	DD/DS
Current Rating	2.0A (AWG #24)	1.0A (AWG #26)	2.0A (AWG #24)	*2.0A (AWG #24)	0.7A (AWG #28)	3.0A (AWG #22)	4.0A (AWG #22)	3.0A (0.3 mm ²)	3.0A (0.3 mm ²)	1.0A (AWG #26)	0.7A (AWG #28)
Voltage Rating	100V	50V	100V	100V	50V	300V	350V		50V	100V	100V
Temp. Range (°C) extension may be possible, pls. clarify	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-55 to +105	-25 to +85	-40 to +125	-40 to +100	-25 to +85	-25 to +85
Orientation	Top/Side	Top/Side	Top entry	Top/Side	Top/Side	Side entry	Side entry	Top/Side	Top/Side	Top entry board-in	Side entry board-in
Crimp	✓	✓	✓	✓		✓	✓	✓	✓		
IDC					✓					✓	✓
Through Hole	✓	✓			✓					✓	✓
SMT	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Dual-Row			✓	✓				✓	✓		
Wire-to-Wire Available		✓	✓		✓						
Active Locking	✓		✓	✓		✓	✓	✓	✓		
No. of positions	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13	4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36	10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13	2	2	8, 12, 16, 20	2, 4, 8, 12, 16, 20, 24	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15
AWG range	30-24	32-26	28-24	28-24	30, 28	30-22	30-22	0.3 mm ²	0.3 mm ²	28, 26	28
Remarks		Socket compatible with IDC type ZR ZM wire-to-wire 2, 3, 9, 13 circuits	header suitable for potting process	*1.5A for 32-40 circuits	IDC version of ZH Compatible with ZH header ZM wire-to-wire 2, 3, 9, 13 circuits	low profile connector (height: 3 mm) designed for LED	low profile connector (height: 3 mm)	Automotive 0.50 terminal PCB pattern as CPT	Automotive 0.50 terminal	PCB thickness 1.2 mm, 1.6 mm	PCB thickness DD: 0.8, 1.0 mm DS: 1.2, 1.6 mm

Wire-to-Board connectors

Pitch	2.0 mm										
Product Series	DR	KR	KRD	MEC	PA	PA modified	PAD	PAMU	PBD	PBV	PH
Current Rating	1.0A (AWG #26)	1.0A (AWG #26)	1.0A (AWG #26)	3.0A (0.3 mm ²)	3.0A (AWG #22)	3.0A (AWG #24)	3.0A (AWG #22)	3.0A (AWG #22)	3.0A (AWG #22)	3.0A (AWG #22)	2.0A (AWG #24)
Voltage Rating	100V	100V	100V	50V	*250V	100V	250V	50V	100V	100V	100V
Temp. Range (°C) extension may be possible, pls. clarify	-25 to +85	-25 to +85	-25 to +85	-40 to +125*	-25 to +85	-40 to +125	-25 to +85	-40 to +125	-25 to +85	-25 to +85	-25 to +85
Orientation	Top/Side	Top/Side	Top/Side	Top/Side	Top/Side Bottom	Top/Side	Top/Side	Top/Side	Side entry	Top/Side	Top/Side
Crimp		✓		✓	✓	✓	✓	✓	✓	✓	✓
IDC	✓	✓	✓		✓						
Through Hole	✓	✓	✓	✓	✓		✓				✓
SMT		✓	✓	✓	✓	✓		✓	✓	✓	✓
Dual-Row				✓			✓		✓		
Wire-to-Wire Available		✓			✓						✓
Active Locking					✓	✓	✓	✓	✓	✓	
No. of positions	2, 3, 4, 5, 6, 7, 8, 9, 10	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16	5, 8, 10, 12, 18, 20, 24	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 15	10, 12, 14, 16, 20, 22, 24, 40	2, 3, 4, 5, 6, 8, 10, 12	16, 20, 30	2, 3, 4, 6, 8, 10, 12, 15	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16
AWG range	28, 26	28, 26	28, 26	0.3 mm ²	28-22	0.22 / 0.35 mm ²	28-22	26, 22	28-22	28-22	32-24
Remarks		IDC version of PH series	Daisy chain connection headers of PH series can be used	*gold plated Automotive with 0.50 terminal keying available	*100V with retainer type high box type available	Automotive, crimp section correspond to VW60330 to meet LV214-2		Automotive, different keying			High box type and wire-to-wire adapter available

Wire-to-Board connectors

Pitch	2.0 mm										2.2 mm
Product Series	PHD	PID	PLI	PND	PNI	PUD	SAN	SGN	SJN	ULH	JFA J1000
Current Rating	3.0A (AWG #22)	3.0A (AWG #22)	3.0A (AWG #22)	3.0A (AWG #22)	3.0A (AWG #22)	3.0A (AWG #22)	2.0A (AWG #24)	2.0A (AWG #24)	3.0A (AWG #22)	5.0A (AWG #22)	*6.4A
Voltage Rating	250V	250V	100V	250V	100V	250V	250V	250V	250V	100V	125/250V
Temp. Range (°C) extension may be possible, pls. clarify	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-40 to +125	-55 to +105
Orientation	Top/Side	Top entry	Top entry	Top entry	Top entry	Top/Side	Top entry board-in	Top entry board-in	Side entry board-in	Side entry & right angle up	Top/Side
Crimp	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
IDC											
Through Hole	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓
SMT						✓				✓	
Dual-Row	✓	✓		✓		✓					✓
Wire-to-Wire Available					✓						✓
Active Locking		✓	✓	✓	✓	✓				✓	✓
No. of positions	8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34	10, 12, 14, 16, 18, 20, 22, 24, 26, 30	2, 3, 4, 5, 6, 7, 8, 9, 10	8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42	2, 3, 4, 5, 6, 7, 8, 9, 10	8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15	8, 13, 14	2, 3, 4, 6, 7, 8, 9, 10, 11	2, 4, 6, 8, 10,	3, 6, 8, 12, 20, 22, 26, 30
AWG range	28-22	26-22	28-22	28-22	28-22	28-22	30-24	28-24	28-22	0.3 / 0.35 mm ²	28-18
Remarks			Inertia lock mechanism		High box type and wire-to-wire available. Inertia lock mechanism		PCB thickness 1.2 & 1.6 mm	PCB thickness 1.2 to 1.6 mm	PCB thickness 1.2 to 1.6 mm	Automotive, USCAR-2 & LV214 Key codes CPA gold/tin	*3 circuits, AWG #18. See catalog for details.

Wire-to-Board connectors

Pitch	2.2 mm	2.5 mm									
Product Series	BMSC	EH	JFAJ2000	LEX	NH	NR	NRD	SCN	XA	XAD	XH
Current Rating	5.0A (0.5 mm ²)	3.0A (AWG #22)	*4.6A	3.0A (AWG #22)	3.0A (AWG #22)	2.0A (AWG #24)	2.0A (AWG #24)	3.0A (AWG #22)	3.0A (AWG #22, #20)	3.0A (AWG #20)	3.0A (AWG #22)
Voltage Rating	150V	250V	250V	300V	250V	250V	250V	250V	250V	250V	250V
Temp. Range (°C) extension may be possible, pls. clarify	-40 to +105	-25 to +85	-55 to +105	-55 to +105	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85
Orientation	Side entry	Top/Side	Top/Side	Bottom	Top/Side/Bottom	* Top	Top/Side	Top entry board-in	Top/Side	Top/Side	Top/Side
Crimp	✓	✓	✓	✓	✓			✓	✓	✓	✓
IDC						✓	✓				
Through Hole	✓ (THR)	✓	✓		✓	✓	✓	✓	✓	✓	✓
SMT				✓					✓		✓
Dual-Row	✓		✓							✓	
Wire-to-Wire Available			✓						✓	✓	
Active Locking	✓		✓	✓					✓	✓	
No. of positions	16, 20, 24, 28, 32, 36, 40	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15	3, 4, 6, 8, 10, 12, 16, 20, 30, 40	2, 4	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 20, 21, 22, 24, 25	2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14	2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 14, 16	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 18, 20	8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 40	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 20
AWG range	0.3 to 0.5 mm ²	32-22	28-20	30-22	30-22	28, 26, 24	28, 26, 24	28-22	28-20	28-20	30-22
Remarks	Automotive, key code available		*3 circuits, AWG #20. • 3.5mm pitch also available • See catalog for details.			*Top entry, Side feed / Compatible with XH header	For daisy chain connection / Compatible with XH header		Compatible with XAF as IDC version, GWT and high box type available		high box type available, compatible with NR and NRD

These specifications comply with the latest status quo and are subject to change without any notice.
This document contains information that is proprietary to J.S.T.



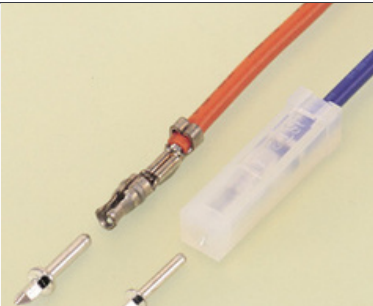

Wire-to-Board connectors

Pitch	2.5 mm		3.0 mm	3.3 mm	3.5 mm	3.81 mm	3.96 mm				4.0 mm
Product Series	XM High Box type	XNI	BSS	BNI	TLDR	JFA J300	HL	SDN	VH	VR	LEB
Current Rating	3.0A (AWG #22, #20)	3.0A (AWG #22)	*7.0A	4.0A (AWG #20)	5.0A (0.5 mm²)	*15.0A	*7.0A	7.0A (AWG #18)	10.0A (AWG #16)	7.0A (AWG #18)	3.0A (AWG #22)
Voltage Rating	250V	250V	250V	300V	600V	250V	300V	250V	250V	250V	300V
Temp. Range (°C) extension may be possible, pls. clarify	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-40 to +125	-55 to +105	-25 to +90	-25 to +85	-25 to +85	-25 to +85	-55 to +105
Orientation	Top entry	Top entry	Top entry	Top entry	Side entry	Top/Side	Top entry	Top entry board-in	Top/Side	Top/Side	Side entry
Crimp	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓
IDC										✓	
Through Hole	✓	✓		✓	✓ (THR)	✓	✓	✓	✓	✓	
SMT			✓								✓
Dual-Row			✓	✓	✓	✓	✓				
Wire-to-Wire Available	✓					✓	✓				
Active Locking	✓	✓	✓	✓	✓	✓	✓		✓		
No. of positions	2, 3, 4, 5, 6, 7, 8, 9, 10	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 15	4, 6, 8, 10	1-row: 2, 3, 6 2-row: 4, 6, 8, 10, 12	12 & 16	3, 4, 5, 6, 8, 10, 12, 16, 20, 40	4, 8, 12	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12	2, 3, 4, 5, 6, 7, 8, 9, 10, 11	2, 3, 4, 5, 6, 8, 10	1, 2
AWG range	28-20	30-22	22-18	24-20	22-20	28-14	22-18	22-18	22-16	26, 24, 22, 20, 18	26-22
Remarks	header suitable for potting process	inertia lock mechanism, key pattern available	*4 & 6 circuits, AWG #18 Inertial lock mechanism, key pattern	suitable for potting process, inertia lock mechanism, key pattern	Automotive, terminal secondary lock and CPA funtion	*1 circuit, AWG #14 See catalog for details.	*4 circuits, AWG #18. See catalog for details.		High box and quick connect (for solid wire) type available	daisy chain and end connections possible	for LED lighting, height: 2.7 mm, horizontal Board-to-Board type available

Wire-to-Board connectors

Pitch	4.0 mm	5.0 mm	5.08 mm	6.0 mm	6.2 mm	8.0 mm	8.8 mm	4/8/12 mm	Hybrid		
Product Series	PSI	NV	XL	JFA J300	JFA J4000	VL	PSI D Type	JFPS	BH	AUH	LBT
Current Rating	*12.0A	10.0A (AWG #16)	*10.0A	*15.0A	*22.0A	*20.0A	*15.0A	*35.0A	1.0A (AWG #22)	power: 5A signal: 1A	power: 8A signal: 0.5A
Voltage Rating	300V	250V	150V	600V	600V	600V	600V	600V	600V	30V	50V
Temp. Range (°C) extension may be possible, pls. clarify	-25 to +85	-25 to +85	-25 to +90	-55 to +105	-55 to +105	-25 to +90	-25 to +85	-40 to +105	-25 to +85	-25 to +85	-25 to +85
Orientation	Top/Side	Top entry	Top/Side	Top/Side	Top/Side	Top entry	Top entry	Top/Side	Side entry	top entry side feed	Side entry
Crimp	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
IDC											
Through Hole	✓	✓	✓	✓	✓	✓	✓	✓			
SMT									✓	✓	✓
Dual-Row	✓		✓	✓		✓					
Wire-to-Wire Available	✓		✓	✓		✓			✓		
Active Locking	✓	✓	✓	✓	✓	✓	✓	✓			
No. of positions	2, 3, 4, 5, 6, 8, 10, 12, 14	2, 3, 4	2, 3, 4, 6, 8, 12, 16	2, 3, 4, 5, 6, 8, 9, 10, 12, 20	2, 3, 4, 6	2, 3, 4, 6, 8, 12	2	1, 2, 3, 4	2, 3, 4, 5	3 & 5	1, 3, 5, 7
AWG range	26-16	22-16	26-16	28-14	16-12	22-12	20-16	16-10	28-22	30-22	28-20
Remarks	*2 circuits, AWG #16 secure locking mechanism, key codes available		*2 circuits, AWG #16. See catalog for details.	*1 circuit, AWG #14. See catalog for details.	J4300S is 6.35mm pitch *2 circuits, AWG #12. See catalog for details.	*2 circuits, AWG #12. high current up to 23A available	*3 circuits without 2nd pin	*1&2 circuits AWG #10 gold and tin plating, different key codes available		height: 1.85 mm	Power supply circuit x2

Wire-to-Board connectors

Pitch	single circuit			
				
Product Series	SDF	SIN	SMF	SPF
Current Rating	5.0A (AWG #20)	depends on wire range	5.0A (AWG #20)	5.0A (AWG #20)
Voltage Rating				
Temp. Range (°C) extension may be possible, pls. clarify	-25 to +85	-25 to +85	-25 to +85	-25 to +85
Orientation	Top entry	Top entry board-in	Top entry	Top entry
Crimp	✓	✓	✓	✓
IDC				
Through Hole	✓	✓	✓	✓
SMT				
Active Locking				
No. of positions				
AWG range	24-20	30-10	26-20	24-20
Remarks	for 1.3 mm diameter and 1.0 mm square contacts	different shapes and hole diameters for PCB thickness 1.2 / 1.6 mm	for 1.0 mm and 1.3 mm diameter pins	for 2.36 mm diameter pins

Wire-to-Wire connectors

Pitch	1.0 mm	1.2 mm	1.5 mm				2.0 mm			2.2 mm
Product Series	NSH	ACH	ZIM	ZM	ZND	ZOM	KR family	PAL	PNI	JFA J1000
Current Rating	1.0A (AWG #28)	2.0A (AWG #28)	2.0A (AWG #24)	0.7A (AWG #28)	2.0A (AWG #24)	2.0A (AWG #24)	1.0A (AWG #26)	3.0A (AWG #22)	3.0A (AWG #22)	*6.4A
Voltage Rating	50V	50V	100V	50V	100V	100V	100V	100V	100V	125V
Temp. Range (°C) extension may be possible, pls. clarify	-25 to +105	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-55 to +105
panel lock					✓		✓	✓	✓	
Crimp		✓	✓	and IDC	✓	✓		and IDC	✓	✓
Dual-Row			✓		✓					✓
Wire-to-Board Available	✓			✓	✓		✓	✓	✓	✓
Active Locking	✓		✓		✓	✓		✓	✓	✓
No. of positions	5	2	8 & 10	2, 3, 9, 13	16, 24, 32, 40	2, 3, 4, 5	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16	2, 3, 4, 5, 6, 7, 8	2, 3, 4, 5, 6, 8, 10	3, 6, 8, 12, 20, 26
AWG range	32-28	30-28	28-24	30-28	28-24	28-24	28-24	28-22	28-22	28-18
Remarks	wire-to-wire adapter for 1-N wire configurations		inertia lock mechanism, retainer mountable type	Mates with ZH (crimp) and ZR (IDC) sockets	retainer mountable type	inner lock mechanism	wire-to-wire adapter for panel thickness 0.5-2.0 mm	compatible with PA family	inertial lock structure, retainer	*3 circuits, AWG #18. See catalog for details.

Wire-to-Wire connectors

Pitch	2.5 mm							3.5 mm	3.81 mm	3.96 mm
Product Series	JFAJ2000	RCY	SM	XA	XAD	XM	XMA	JFAJ2000	JFA J300	HL
Current Rating	*4.6A	3.0A (AWG #22)	3.0A	3.0A (AWG #22, #20)	3.0A (AWG #20)	3.0A (AWG #20)	3.0A (AWG #22)	*3.6A	*12.25A	*7.0A
Voltage Rating	125/250V	250V	250V	250V	250V	250V	250V	250V	250V	300V
Temp. Range (°C) extension may be possible, pls. clarify	-55 to +105	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-55 to +105	-55 to +105	-25 to +90
panel lock	✓		✓	✓	✓	✓		✓	✓	✓
Crimp	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Dual-Row	✓		✓		✓	✓		✓	✓	✓
Wire-to-Board Available	✓			✓	✓	✓		✓	✓	✓
Active Locking	✓		✓	✓	✓	✓	✓	✓	✓	✓
No. of positions	3, 4, 6, 8, 10, 12, 16, 20	2	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 18	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15	8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 40	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 18	2, 3, 4, 5, 6	12, 18, 20	3, 4, 5, 6, 8, 10, 12, 16, 20	2, 3, 4, 8, 9, 12
AWG range	28-20	28-22	28-22	28-20	28-20	28-20	26-22	28-20	28-14	22-18
Remarks	*3 circuits, AWG #20. • 3.5mm pitch also available • See catalog for details.	small size: mating dimension: 23.3 x 4.0 mm	housing color black and white available	GWT version available, retainer mountable	retainer mountable	retainer mountable, inner housing lock	retainer mountable	*12 circuits, AWG #20. • 2.5mm pitch also available • See catalog for details.	*3 circuit, AWG #14 See catalog for details.	*2 circuits, AWG #18. See catalog for details.

Wire-to-Wire connectors

Pitch	3.96 mm	4.0 mm	4.5 mm		5.0 mm		5.08 mm	5.4 mm	6.2 mm		11.0 mm
Product Series	SL	PSI	EL	YL	XL	ZL	JFA J300	JFA J300	VL	VL high current	JFA J5000
Current Rating	*7.0A	*12.0A	*10.0A	*10.0A	*10.0A	*10.0A	*15.0A	*8.5A	*20.0A	*23.0A	*50.0A
Voltage Rating	300V	300V	300V	300V	300V	300V	600V	600V	600V	600V	600V
Temp. Range (°C) extension may be possible, pls. clarify	-25 to +90	-25 to +85	-25 to +90	-25 to +90	-25 to +90	-25 to +90	-55 to +105	-55 to +105	-25 to +90	-25 to +90	-55 to +105
panel lock		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Crimp	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Dual-Row	✓		✓	✓	✓	✓	✓		✓	✓	✓
Wire-to-Board Available		✓			✓		✓		✓	✓	
Active Locking	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
No. of positions	1, 2, 3, 4, 6	2, 3, 4	2, 3, 4, 6, 9, 12, 15	1, 2, 3, 4, 6, 8, 9, 12, 15, 16, 21	2, 4, 8, 12, 16	2, 4, 6, 8, 12, 16	1, 2, 3, 4, 6, 9, 12, 18, 20, 24	30 & 40	1, 2, 3, 4, 6, 8, 12	1, 2, 3, 4	1, 2, 3, 4, 6, 10
AWG range	26-18	26-16	26-16	26-16	26-16	26-16	28-14	28-14	22-12	20-12	16-8
Remarks	*1/2 circuits, AWG #18 See catalog for details.	*2 circuits, AWG #16 secure locking mechanism, key codes available	*2/3/4 circuits, AWG #16 See catalog for details.	*1/2 circuit, AWG #16 See catalog for details.	*2 circuit, AWG #16 See catalog for details.	*2 circuit, AWG #16 See catalog for details.	*1 circuit, AWG #14 See catalog for details.	*30/40 circuit, AWG #14 See catalog for details. Triple row.	*1/2 circuit, AWG #12 See catalog for details.	*1/2 circuit, AWG #12 See catalog for details.	*1 circuit, AWG #8 See catalog for details.

Waterproof connectors

Pitch	1.5 mm	2.0 mm		4.0 mm		5.0 mm		-	-
Product Series	ZWP	JWPF Wire-to-Board	JWPF Wire-to-Wire	JWPS Wire-to-Board	JWPS Wire-to-Wire	WPJ Wire-to-Board	WPJ Wire-to-Wire	UB Micro USB Waterproof	UBC type-C Waterproof
Current Rating	2.0A (AWG #24)	3.0A (AWG #22)	3.0A (AWG #22)	*6.0A (AWG #18)	*6.0A (AWG #18)	7.0A (AWG #18)	7.0A (AWG #18)	*1.8A(power)/ 0.5A(signal)	1.25A/ 0.25A
Voltage Rating	50V	100V	100V	300V	300V	300V	300V	30V	20V
Temp. Range (°C) extension may be possible, pls. clarify	-25 to +85	-55 to +85	-55 to +85	-55 to +85	-55 to +85	-25 to +85	-25 to +85	-30 to +85	-25 to +85
wire-to-board		✓		✓		✓			
orientation		Top entry		Side entry		Top entry		Side entry	Side entry
SMT / THT		THT		THT		THT		SMT	SMT
wire-to-wire	✓		✓		✓		✓		
dual row	✓	✓	✓	✓	✓				
Active Locking	✓	✓	✓	✓	✓	✓	✓		
No. of positions	2, 3, 4, 5, 6, 8	2, 3, 4, 6, 8	2, 3, 4, 6, 8	2 & 4	2 & 4	2 & 3	2 & 3	5	24
AWG range	28-24 (OD 0.9-1.2 mm)	26-22 (OD 1.4-1.7 mm)	26-22 (OD 1.4-1.7 mm)	22-18 (OD 1.75-2.5 mm)	22-18 (OD 1.75-2.5 mm)	22-18 (OD 2.32-2.83 mm)	22-18 (OD 2.32-2.83 mm)	-	-
Remarks	IPX7 (IEC60529)	IPX7 (IEC60529)	IPX7 (IEC60529) planning: 10-16 circuits Panel lock type 8-circuits available	*4 circuit, AWG #18 See catalog for details. IPX7 (IEC60529)	*4 circuit, AWG #18 See catalog for details. IPX7 (IEC60529)	non-waterproof available IPX7 (IEC60529)	non-waterproof available IPX7 (IEC60529)	*1.0A for signal use only IPX7 (IEC60529)	<ul style="list-style-type: none"> Power supply max. 100W USB3.2 compl. data trans. rate of up to 20 Gbps IPX8 (IEC60529)

Board-to-Board connectors

Pitch	0.5 mm		1.25 mm		2.5 mm			4.0 mm
Product Series	JMC	JMD	JE	JED	HVQ	JL	JQ	LEB
Current Rating	0.5A	0.5A	1.0A	1.0A	3.0A	3.0A	3.0A	3.0A
Voltage Rating	50V	50V	50V	50V	250V	250V	250V	300V
Temp. Range (°C) extension may be possible, pls. clarify	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-55 to +105
Orientation	vertical & parallel	vertical & parallel	vertical	vertical & parallel	vertical, parallel, horizontal	vertical	vertical, parallel, horizontal	horizontal
Through Hole			✓	✓	✓	✓	✓	
SMT	✓	✓						✓
Dual-Row	✓	✓		✓				
Positive Locking			✓	✓	✓	✓		
Stack height	3-10mm standard type 4-11mm misalignment absorption type	4.5mm-6.0mm	-	7.0mm	11.4mm	-	11.8mm	
No. of positions	14, 16, 18, 20, 24, 30, 34, 40, 42, 46, 50, 60, 64	20, 30, 40, 50, 60, 70, 80, 100	5, 7, 9, 11, 13, 15, 17, 19	8, 16, 22	3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25	3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 15	3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 15	1 & 2
Remarks	Versatile connector system						Compatible with XH header	low profile: height 2.7 mm wire-to-board also available

FFC / FPC connectors

Pitch	0.25 mm	0.3 mm		0.4 mm	0.5 mm					
Product Series	FGEM	FXR	FXZT	FZA	FHA	FHH	FHYS	FHT	FKZ	FLH
Current Rating	0.2A	0.2A	0.2A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A
Voltage Rating	50V	50V	50V	50V	50V	50V	50V	50V	50V	50V
Temp. Range (°C) extension may be possible, pls. clarify	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85
ZIF	✓	✓	✓			✓	✓		✓	✓
non-ZIF				✓	✓			✓		
THT / SMT	SMT	SMT	SMT	SMT	SMT	SMT	SMT	SMT	SMT	SMT
Orientation	Side entry	Side entry	Top entry	Side entry	Side entry	Side entry	Side entry	Top entry	Side entry	Side entry
Standard plating <small>other plating maybe available</small>	gold	gold	gold	gold	gold	gold	gold	gold	tin	tin
contact location	double	bottom		double	double	double	bottom		top / bottom	top / bottom
height (mm)	1.4/1.69	1.0	3.7	1.0	1.1	2.0	0.9	3.3	1.8	1.2
No. of positions	13, 17, 19, 23, 27, 35, 39, 41, 45, 51	11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 45, 47, 51, 61	(Inner lock) 17, 21, 23, 27, 31, 33, 39 (Outer lock) 45, 51	4, 5, 6, 7, 8, 10, 12, 13, 14, 16, 20, 22, 24	4, 5, 6, 7, 8, 9, 10, 11, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30	10, 20, 30, 40, 50, 60	4, 5, 6, 8, 10, 11, 12, 14, 15, 16, 17, 18, 20, 22, 24, 27, 28	4, 5, 6, 7, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 32	5, 6, 8, 12, 13, 14, 16, 18, 19, 20, 22, 24, 26, 27, 28, 30, 32	4, 6, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 20, 21, 22, 24, 28, 30, 40
Remarks	mid-flip /back lock type for FPC with protrusions	front-flip type		layout compatible with FZ connector	renewal of FHJ connector	back-flip type for FPC with protrusions	front-lock type	Halogen-free, single action feature		

FFC / FPC connectors

Pitch	0.5 mm			1.0 mm					1.25 mm
Product Series	FLT	FLZ	FLZT	FAZ	FM	FMN	FMS	FPZ	FFS
Current Rating	0.5A	0.5A	0.5A	1.0A	0.5A	0.5A	0.5A	0.5A	0.5A
Voltage Rating	50V	50V	50V	50V	50V	50V	50V	50V	50V
Temp. Range (°C) extension may be possible, pls. clarify	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85	-25 to +85
ZIF		✓	✓	✓				✓	
non-ZIF	✓				✓	✓	✓		✓
THT / SMT	SMT	SMT	SMT	SMT	THT / SMT	THT / SMT	SMT	SMT	SMT
Orientation	Top entry	Side entry	Top entry	Top/Side	Top/Side	Top/Side	Side entry	Side entry	Side entry
Standard plating <small>other plating maybe available</small>	tin	tin	tin	tin	tin	tin	tin	tin	tin
contact location		top / bottom		top / bottom	double	top	double	bottom	double
height	4.15	2.0	3.9	5.0 / 2.8	4.4 / 3.0	5.1/5.15/3.0/3.05	2.8	2.9	2.8
No. of positions	6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 40	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32, 33, 34, 36, 40, 42, 50	6, 8, 10, 12, 14, 15, 16, 18, 20, 21, 22, 24, 28, 30, 40	8, 9, 11, 16, 20, 22, 24, 25, 26	3, 4, 5, 6, 7, 8, 10, 11, 12	*4 - 40	3, 4, 5, 6, 8, 10, 11, 12, 14	7, 8, 10, 11, 12, 13, 14, 15, 16, 18, 20, 24, 25	4, 5, 6, 8, 15, 21, 26
Remarks						*See catalog for details			

Interface & Coaxial connectors

Product Series	USB 2.0 Type A&B	USB Type C		Product Series	AUY2T
Current Rating	1.0A / line	1.25A / 0.25A		Current Rating	0.3A
Voltage Rating	30V	20V		Voltage Rating	30Vms
Temp. Range (°C) extension may be possible, pls. clarify	-55 to +85	-25 to +85		Temp. Range (°C) extension may be possible, pls. clarify	-25 to +85
Orientation	side / vertical / straight	Side entry		Orientation	Top entry side feed
THT	✓	✓		THT	
SMT	✓	✓		SMT	✓
dual row available	✓			height	1.05 mm
flange	side and upper available	PCB flange available		applicable coaxial cable	dia. 0.81 mm
solder tab	with and without available			receptacle	base dia. 1.3 mm
Remarks		up to 10,000 mating cycles power supply up to 100W		Remarks	Micro coaxial connector Frequency range : DC to 20 GHz plug harness with SMA available



In addition to our large product range, we offer a variety of processing tools such as hand tools and crimping dies.

If you need assistance with wiring our products, we are happy to offer you harnesses according to your requirements.

We are a UL-registered harness manufacturer, category ZPFW2 (US) and ZPFW8 (Canada). File No. E466125.

We will find a solution for your project. Let's stay connected.



JST Deutschland GmbH

Küferstraße 15

D-73650 Winterbach

Switchboard: +49 / 71 81 / 40 07 – 0

Fax: +49 / 71 81 / 40 07 – 21

E-Mail: customer.service@jst.de

www.JST.de



CONTACT US

